Multi-Disc CD Player

Model CDC-3

Description

Bogen's CDC-3 Multi-Disc CD Player is an excellent choice as a background music source.

The CDC-3 has a stereo aux input for an additional audio source that feeds through whenever the CD has stopped playing and the convenience of both a stereo and a mono output. It is rack-mountable and comes with rubber feet for tabletop use.

The CDC-3 provides uninterrupted play; includes random, repeat, and introductory play functions; has five separate modes of operation; the capability to program up to 36 tracks from up to 3 separate discs; and a liquid crystal display with multiple running time display options.

Features

- 3 Disc changer
- Load or remove discs without interrupting play
- Stereo aux input for additional audio source that feeds through whenever the CD stops playing
- Both a stereo and a mono output
- Output volume control
- Integral rack mount
- Two rack spaces high
- Program up to 36 tracks from up to three separate discs
- Review, clear, or change programmed tracks
- Multiple operating modes for a variety of features and functions
- Push-button operation
- Randomly play tracks from 1, 2 or 3 discs at a time
- Repeatedly play a single track, a single disc, or all of the discs installed
- High-speed search, forward or reverse
- Play each track of a single disc, or all of the discs installed, for 10 seconds
- All connections made using RCA cables
- Individual disc eject buttons
- Liquid Crystal Display
- Three possible running time displays: (1) the amount of time remaining on the track being played, (2) the amount of time elapsed on the track being played, and (3) the remaining time left on the disc in its entirety

BOGEN®

Specifications subject to change without notice.
© 2001 Bogen Communications, Inc.
Part No. 54-8012-01R1 Printed in U.S.A. 0110

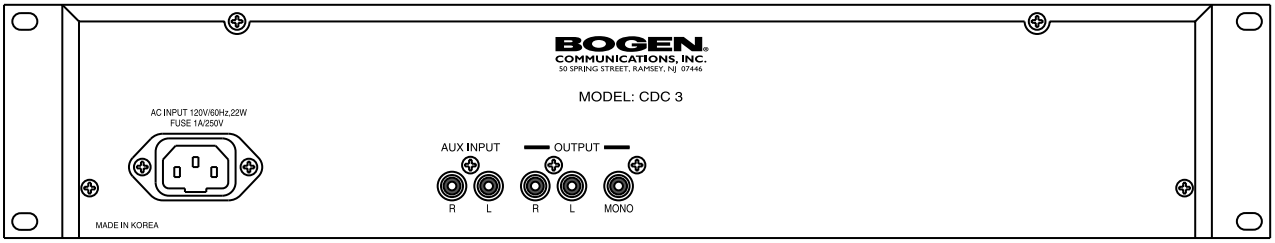

Technical Specifications

Frequency Response:	20Hz - 20kHz
THD (20Hz - 1kHz):	<.05%
(20Hz - 20kHz):	<.7%
Signal-to-Noise Ratio (1kHz):	>70dB
Audio Output Level:	1.5V (Stereo) / 3V (Mono)
Memory:	36 tracks
Channel Separation:	1kHz, 65dB; 10kHz, 55dB
Power Source:	120V AC, 60Hz
Power Consumption:	22 watts
Product Weight:	14 lbs.
Dimensions:	18-7/8" W x 3-3/8" H x 11" D

Architect and Engineer Specifications

The music source shall be a Bogen Model CDC-3 Multi-Disc CD Player that can be programmed to play tracks from any of up to three discs held in the unit.

The CD player shall provide a stereo aux input that feeds through whenever the CD stops playing and both a stereo and mono output.

The frequency response shall be 20Hz - 20kHz. The signal-to-noise ratio shall be greater than 70dB. The audio output level shall be 1.5V stereo and 3V mono.

The CD player shall come with introduction, random, repeat, clear, search, and scan functions. The player shall include an output volume control and a liquid crystal display (LCD).

The player shall have the capacity to program up to 36 tracks from 3 separate discs and review, clear, or change the programming.

The player shall include three possible running time displays: (1) the amount of time remaining on the track being played, (2) the amount of time elapsed on the track being played, and (3) the remaining time left on the disc in its entirety.

The player shall include five modes of operation: ONE, 1 DISC, 1 DISC INTRO, ALL, and ALL INTRO. The modes only affect regular playback operation, random playback, and intro playback.

The CD player shall be enclosed in a heavy-gauge steel chassis.

The player shall fit into a 19" rack using only two rack spaces. The unit shall include integral rack mount ears. It shall allow the attachment of feet for tabletop placement.

The product weight shall be 14 lbs. The dimensions shall be 18-7/8" W x 3-3/8" H x 11" D.

BOGEN®
COMMUNICATIONS, INC.
50 Spring Street, Ramsey, New Jersey 07446, U.S.A.
201-934-8500 FAX: 201-934-9832
Web Site: www.bogen.com